







R	H																	
	12,8	14	16	18	20	22,4	24,9	28	30	32	35	37,5	40	42,5	45	47,5	50	52,5 m
52,5	6000	5390	4580	3960	3460	3000	3000	2610	2410	2230	2000	1840	1700	1580	1470	1370	1280	1200 kg
50,0	6000	5820	4960	4290	3760	3000	3000	2830	2610	2420	2180	2000	1850	1720	1600	1490	1400 kg	
47,5	6000	5830	4960	4300	3770	3000	3000	2840	2620	2430	2180	2010	1860	1720	1610	1500 kg		
45,0	6000	5830	4960	4300	3770	3000	3000	2840	2620	2430	2180	2010	1860	1720	1610	1500 kg		
42,5	6000	5420	4700	4130	3670	3000	3000	2870	2660	2400	2210	2040	1900 kg					
40,0	6000	5550	4820	4240	3760	3200	3000	3000	2730	2460	2270	2100 kg						
37,5	6000	5500	4770	4200	3730	3170	3000	3000	2710	2440	2250 kg							
35,0	6000	5620	4880	4290	3810	3240	3000	3000	2780	2500 kg								
30,0	6000	5430	4710	4140	3670	3000	3000	2900	30 m									



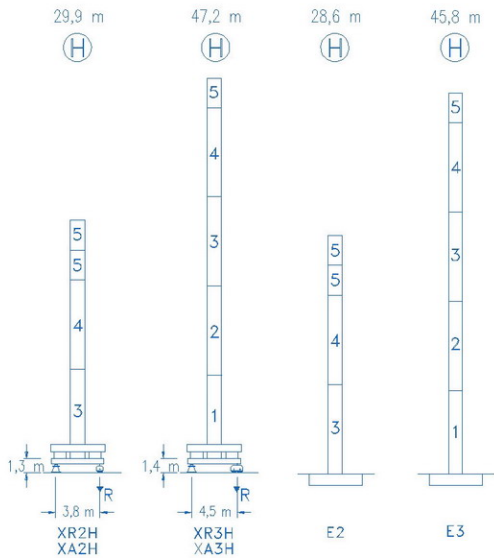

N	Ref.	h
1	MT123	10,1 m
2	MT123A	10,1 m
3	MH124A	11,8 m
4	MH124-1	11,8 m
5	MH121	3,0 m
6	CL20	2,2 m

MH124-1=(4)MH121-0,2 m

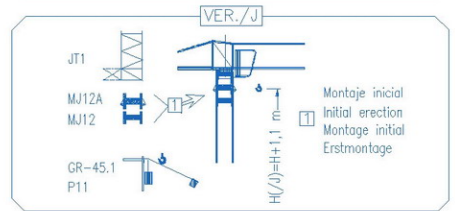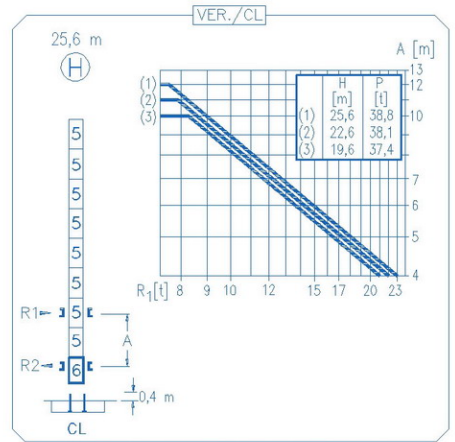


R. máx.	En servicio	XR2H 41,0 t
	In operation	
	En service	
	In Betrieb	
		XR3H 53,0 t

R. máx.	Fuera de servicio	XR2H 40,0 t
	Out of service	
	Hors service	
	Ausser Betrieb	
		XR3H 79,0 t

CFU-4.0
4 kW
0 ↻ 90 m/min

GR-4.5
2x45 Nm
0 ↻ 0,7 rpm

TS2-4.5	TS2-5.5
2x45 Nm	2x55 Nm
0 ↻ 20 m/min	
XR2H	XR3H

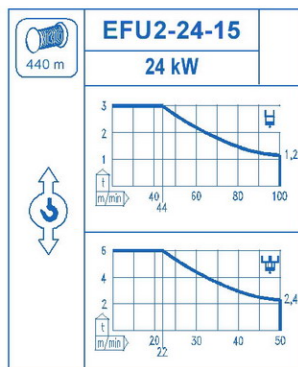

Tensión de alimentación	400 V
Operating voltage	3 ph
Tension de service	50 Hz
Betriebsspannung	

Opcional	*
Optional	
En option	
Kaufoption	